


UNINTERRUPTIBLE POWER SYSTEM (UPS)

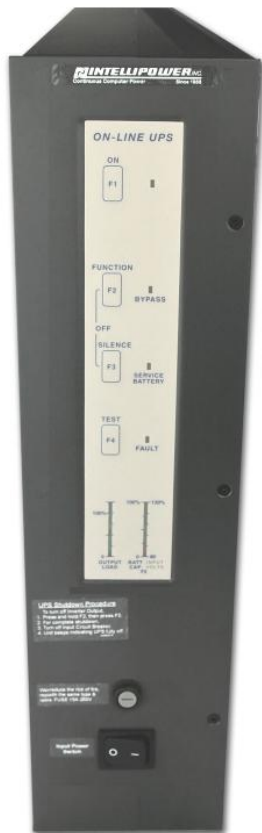

FEATURES & BENEFITS

Rugged & Extreme Environments

All IntelliPower systems utilize circuit boards, chassis and components that are **specifically designed for extreme environments**. In today's marketplace, repackaged commercial products are often billed as "rugged" and/or "built for harsh environments". Each component in our systems is specifically selected or designed based upon proven performance in harsh indoor and outdoor applications.

Cutting Edge Technology

Our digital double conversion on-line UPS, power conditioner and frequency/voltage converter solutions utilize high-efficiency power switching and galvanic isolation which provides **ideal electrical output performance**. Systems are available with global voltage inputs & outputs, AC inputs & outputs, and DC inputs & outputs. You will be able to utilize any power source.

IntelliPower offers power management software along with many standard communications protocols such as SNMP with OID and MIB Support, RS-232, Ethernet/IP – Common Industrial Protocol (CIP), MODBUS and Dry/Discrete Contacts. The sum total of these technological features equals the ultimate protection for your electronic equipment.

Robust Product Portfolio

No other UPS company offers **2,000+ variations**. Utilizing IntelliPower's building block methodology, more product features and functionality are provided; without having to extend lead times or change proven designs. Over the past 25 years, IntelliPower has developed its electronics hardware, firmware, embedded software and enclosure technology in house, which provides us with a unique capability to meet virtually any of your application requirements to include completely sealed systems.

Designed and Manufactured in the USA

The engineering and technological expertise within IntelliPower has enabled us to develop and field test products since 1988 to **100% user satisfaction**. For you, this translates into shorter lead times from design to shipping as well as personalized service and support. Our mission is to provide you with the highest standard of customer support and quality control.

ISO 9001: 2008 Certified

IntelliPower is committed to customer satisfaction by delivering power system solutions and services that meet or exceed customer requirements through design innovation and continuous improvement.

To find out more about IntelliPower capabilities, please visit our website at www.intellipower.com/capabilities.

Part # FA00150
Model # IQ500H-120-Isol-FC-PFC-2U18

CORPORATE HEADQUARTERS

1746 N. Saint Thomas Circle • Orange, CA 92865 USA
Tel: 714.921.1580 • Fax: 714.921.4023
Email: sales@intellipower.com • www.intellipower.com

All Products Designed and Manufactured in the U.S.A.



| Uninterruptible Power System (UPS) | |
|---|---|
| IP Part #: | FA00150 |
| IP Model #: | IQ500H-120-Isol-FC-PFC-2U18 |
| Unit Description: | Power rating of 350 watts, Input Voltage 120VAC at 50/60Hz, Input Isolation, Output Voltage at 115VAC at 50/60Hz +/- 3Hz, Minimum battery run time of 15 min at 350 watts |
| SPECIFICATIONS | |
| Power Rating: | 500 VA, 350 Watts |
| Input AC Voltage 1: | 120 VAC, (-25% +15%) |
| Input Frequency 1: | 50 or 60 Hz, (+/- 5 Hz) |
| Input Max Current: | 5.5 Amps |
| Output AC Voltage 1: | 115 VAC, (+/-3%) |
| Output Frequency: | 50 or 60 Hz, (+/-3 Hz), follower |
| Enclosure Type: | free standing |
| Enclosure Dimensions: | English: 17 x 3.5 x 18 inch(Height x Width x Depth) Metric: 43.18 x 7.62 x 45.72 cm(Height x Width x Depth) |
| Enclosure Material and Finish: | steel, powder coated charcoal gray |
| Enclosure Airflow: | side to rear |
| Connector(s) AC Input 1: | 1 each IEC 60320 C14 |
| -position: | panel mounted, rear |
| Connector(s) AC Output 1: | 4 each NEMA 5-15R |
| -position: | panel mounted, rear |
| Battery Type: | 12V7Ah Pb-Acid |
| Battery Quantity Total: | 2 |
| Battery Strings Quantity Total: | 1 |
| Battery Voltage per String: | 24 VDC |
| Battery Runtime: | Approximately 12 minutes at 350 Watts |
| Battery Mounting: | fixed |
| Temperature Operating: | -15C to 50C (Celsius), 5 to 122F (Fahrenheit) |
| Humidity: | 5 to 95% non-condensing |
| PFC Feature: | input power factor correction |
| Isolation: | isolated |
| Application: | all |
| Auto Start: | inverter output configured to start automatically, manual start available in settings |
| Conformal Coating: | included |
| Communications Protocol: | RS-232, opto-isolated |
| Switches and Breakers AC Input 1: | rocker switch |
| Switches and Breakers AC Output 1: | 1 each 1P10A, push to reset |
| Neutral Bonding: | switch |

ISO 9001: 2008 Certified

TAA Compliant

**CORPORATE HEADQUARTERS**
 1746 N. Saint Thomas Circle • Orange, CA 92865 USA
 Tel: 714.921.1580 • Fax: 714.921.4023
 Email: sales@intellipower.com • www.intellipower.com

All Products Designed and Manufactured in the U.S.A.

